







**WaterflowControl**

# WFC-FC-7CB5K

## Filter Cartridge

### Contact Us:

-  (02) 9948 0699
-  [info@waterflowcontrol.com.au](mailto:info@waterflowcontrol.com.au)
-  [www.waterflowcontrol.com.au](http://www.waterflowcontrol.com.au)
-  D1/20 Picrite Close, Pemulwuy, NSW



# WFC-FC-7CB5K Filter Cartridge

## Applications

- Ice
- Special problem solving cartridge

## Features and Benefits

- Carbon block filter finely polishes water for high quality beverage and food applications
- Features KDF® Media which inhibits microbial buildup (as tested by KDF)
- Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination
- NSF® Certified under NSF/ANSI Standard 42
- Reduces chlorine taste and odor and other offensive contaminants that can adversely affect the taste of water and beverages
- Reduces extra fine dirt and particles as small as five (5) microns in size
- Saves energy by reducing limescale build-up that can cause excessive machine downtime and increased maintenance costs



## Installation Tips


- Install vertically with cartridge hanging down
- Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement
- Flush cartridge by running water through system for five (5) minutes at full flow

## Sizing

- **Service Flow Rate:** Maximum 2.5 gpm (9.46 Lpm)
- **Capacity:** 10,000 gallons (37,854 L)

## Operation Tips

- Change cartridges on a regular six (6) month preventative maintenance program
- Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar)
- Always flush the filter cartridge at time of installation and cartridge change

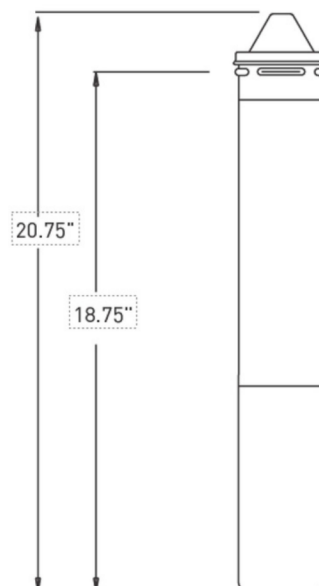

System Tested and Certified by NSF International against NSF/ANSI Standard 42 for the reduction of:  
Standard No. 42: Aesthetic Effects  
Chemical Unit  
Taste and Odor Reduction  
Chlorine Reduction

Specifications	
Overall Dimensions	20.75" L x 3.25" dia. (52.7 x 8.2 cm)
Capacity	0,000 gallons (37,854 L)
Service Flow Rate	Maximum 2.5 gpm (9.46 Lpm)
Pressure Requirements	10 - 125 psi (0.7 - 8.6 bar), non-shock
Temperature	35 - 100°F (2 - 38°C)
Electrical Connection	None Required